

4N Gas Tapping Bands are manufactured to ATCO Gas Australia standards as per Document Code: ENS TS002. They are precision moulded in a high grade, engineered plastic with Grade 316 stainless steel bolts and nuts coated in a specially formulated anti galling compound.

FEATURES

- Manufactured from high quality, glass reinforced Noryl resin
- Grade 316 Stainless Steel nuts and bolts
- Nuts are coated with anti galling compound
- Double lip Nitrile rubber seal
- Suits uPVC pipe only
- Available with 25, 40 and 50mm BSP threaded off-takes
- All fittings comply to Western Australia Gas network Standards



G-TB10025MS1




G-TB10025S1

TECHNICAL DATA

Size Range:	uPVC Pipe:DN40 - DN195
Pressure Rating:	1600kPa
Temperature Range:	-40°C to 70°C
Product Standards:	AS/NZS 4793:2009 in conjunction with ATCO Gas Document Code
Document Code:	ENS TS002 - ATCO Gas Australia

APPLICATIONS

Suitable for Western Australia's underground gas network, 4N Gas Tapping Bands are designed for use on approved PVC gas pipelines only.

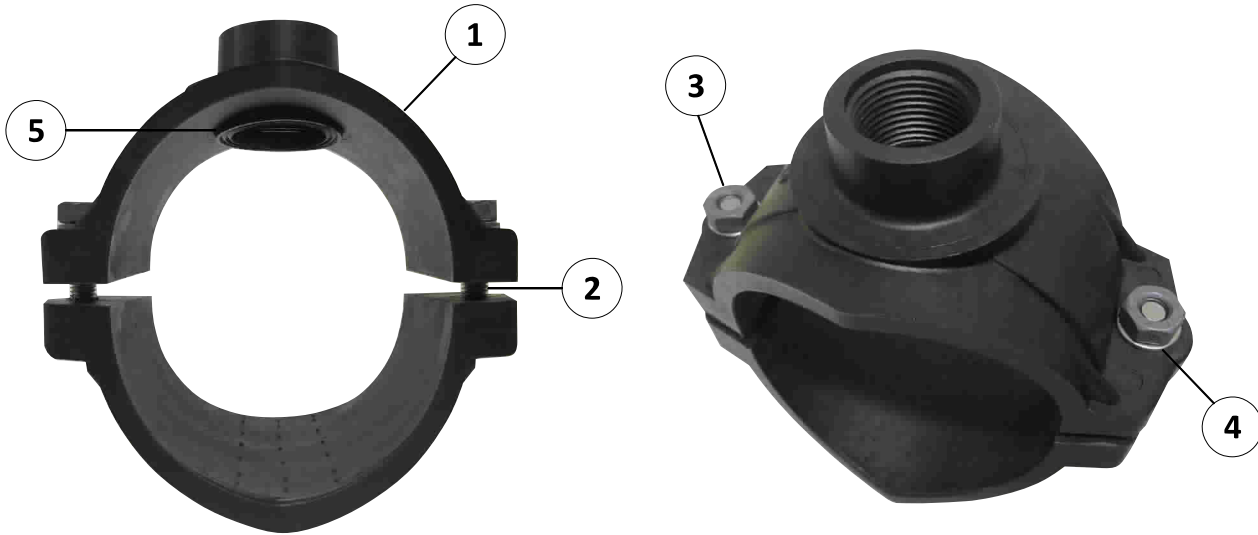

PARTS and MATERIAL

No.	Description	Material	Quantity
1	Body	High grade engineered plastic	1
2	Bolt	Grade 316 Stainless Steel	2
3	Nut	Grade 316 Stainless Steel	2
4	Washer	Grade 316 Stainless Steel	2
5	Double Lip Seal	Nitrile rubber	1

DIMENSIONS

Size (mm)	Hex Bolts	Hex Nuts
40	M10 x 40	M10
50	M10 x 40	M10
80	M10 x 45	M10
100	M10 x 45	M10
155	M10 x 100	M10
195	M10 x 100	M10

PRODUCT RANGE

Product Code	Product Description	DN	OD
--------------	---------------------	----	----

Gas Standard Tapping Bands

G-TB4025SNL	40x25mm std T/Band	40	48 +/- 0.8
G-TB5025SNL	50x25mm std T/Band	50	60 +/- 0.8
G-TB8025SNL	80x25mm std T/Band	80	89 +/- 0.8
G-TB8040SNL	80x40mm std T/Band	80	89 +/- 0.8
G-TB8050SNL	80x50mm std T/Band	80	89 +/- 0.8
G-TB10025S1	100x25mm STD T/BAND BLACK S1	100	114 +/- 0.8
G-TB10040S1	100x40mm STD T/BAND BLACK S1	100	114 +/- 0.8
G-TB10050SNL	100x50mm std T/Band	100	114 +/- 0.8
G-TB15525SNL	155x25mm std T/Band	155	168 +/- 0.8
G-TB15540SNL	155x40mm std T/Band	155	168 +/- 0.8
G-TB15550SNL	155x50mm std T/Band	155	168 +/- 0.8
G-TB19525SNL	195x25mm std T/Band	195	218 +/- 0.8
G-TB19550SNL	195x50mm std T/Band	195	218 +/- 0.8

Gas Modified Tapping Bands

G-TB4025MNL	40x25mm mod T/Band	40	48 +/- 0.8
G-TB5025MNL	50x25mm mod T/Band	50	60 +/- 0.8
G-TB8025MNL	80x25mm mod T/Band	80	89 +/- 0.8
G-TB10025MS1	100x25mm MODIFIED T/BAND BLACK S1	100	114 +/- 0.8
G-TB10040MNL	100x40mm mod T/Band	100	114 +/- 0.8
G-TB15540MNL	155x40mm mod T/Band	155	168 +/- 0.8
G-TB19550MNL	155x50mm mod T/Band	195	218 +/- 0.8

DISCLAIMER

Information contained in this data sheet is up to date and correct as at the date of issue. As 4N Products cannot control or anticipate the conditions under which these products may be used, each user should review the information in specific context of the planned use. To the maximum extent permitted by law, 4N Products will not be responsible for damages of any nature resulting from the use or reliance upon the information contained in this data sheet. No express or implied warranties are given other than those implied mandatory by law.